

High performance, high clarity lamination sealant film



ExxonMobil's Exceed™ S performance polyethylene and Exact™ plastomers allow the fabrication of lamination sealant film that provides the following benefits:



Reliable packaging integrity



Outstanding optical performance




Excellent processability and high output

- **Exceed S performance PE resins** can offer a balanced combination of stiffness and toughness for easy processability and maintain bag drop performance.
- **Exact 3237 plastomers** can offer low seal initiation temperature, good seal-through contamination performance and broad sealing window.

5-layer film structure

- Exceed S 9272
- Exceed S 9243
- Exact 3237
- ExxonMobil™ LDPE LD 105BR

Thickness: 50 μm

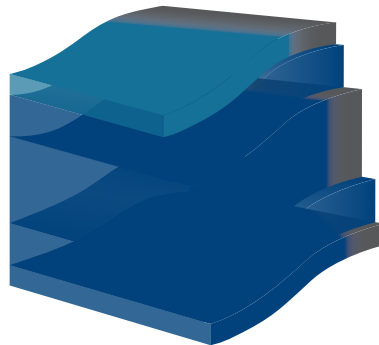

Polymer properties	Exceed S 9272	Exceed S 9243	Exact 3237	ExxonMobil LDPE LD 105BR	Test method* (based on)	Unit
Melt index (190 °C/2.16 kg)	0.80	0.85	2.0	2.0	ASTM D1238	g/10 min
Density	0.920	0.926	0.908	0.923**	ASTM D792	g/cm ³

* For detailed product information, please consult the individual grade data sheet, available on our website: www.exxonmobilchemical.com. Values given are typical and should not be interpreted as specifications. Data generated by or on behalf of ExxonMobil Product Solutions. ** Test method based on ASTM D1505.



For more information, scan QR code on WeChat: ExxonMobil Booth: Hall 6.2 Booth C57

A new chapter in collaboration
For more information: exxonmobilchemical.com.cn/pe

© 2024 ExxonMobil. ExxonMobil, the ExxonMobil logo, the interlocking "X" device and other product or service names used herein are trademarks of ExxonMobil, unless indicated otherwise. This document may not be distributed, displayed, copied or altered without ExxonMobil's prior written authorization. To the extent ExxonMobil authorizes distributing, displaying and/or copying of this document, the user may do so only if the document is unaltered and complete, including all of its headers, footers, disclaimers and other information. You may not copy this document to or reproduce it in whole or in part on a website. ExxonMobil does not guarantee the typical (or other) values. Any data included herein is based upon analysis of representative samples and not the actual product shipped. The information in this document relates only to the named product or materials when not in combination with any other product or materials. We based the information on data believed to be reliable on the date compiled, but we do not represent, warrant, or otherwise guarantee, expressly or impliedly, the merchantability, fitness for a particular purpose, freedom from patent infringement, suitability, accuracy, reliability, or completeness of this information or the products, materials or processes described. The user is solely responsible for all determinations regarding any use of material or product and any process in its territories of interest. We expressly disclaim liability for any loss, damage or injury directly or indirectly suffered or incurred as a result of or related to anyone using or relying on any of the information in this document. This document is not an endorsement of any non-ExxonMobil product or process, and we expressly disclaim any contrary implication. The terms "we," "our," "ExxonMobil Product Solutions" and "ExxonMobil" are each used for convenience, and may include any one or more of ExxonMobil Product Solutions Company, Exxon Mobil Corporation, or any affiliate either directly or indirectly stewarded.

Classicx™ 5-layer co-extrusion POD blown film line

Machine model: M5B-2800Q-C

Machine specifications:

Five-layer co-extrusion	A	B	C	D	E	
Configuration of extruder	60	80	105	80	60	mm
Layer ratio	1:2:4:2:1					
Film width	2500					mm
Max. extrusion throughput	1390					kg/h
Target output capacity	900					kg/h
Die diameter	650, 550					mm

