


Off-line pre-stretched hand wrap film for benefits in your operations



Pre-stretched hand wrap film for more efficiency - 9-layer film structure.

Thickness: 15 µm

- Exceed XP 8346
- Exceed 4536PA
- Exceed 3518CB
- Exceed 3812CB
- Vistamaxx 6000
- ExxonMobil™ LDPE252

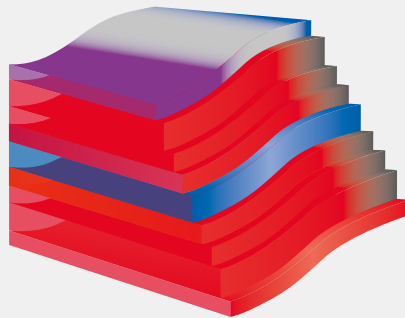

Exceed™ XP, Exceed™ and Vistamaxx™ performance polymers boost the stretchability, holding force and toughness of the film:



Stretching down to 5-6 micron at 1100 m/min



Better load stability with less material



Easier to apply



Cost saving

Polymer properties	Exceed XP 8346	Exceed 3518CB	Exceed 3518CB	Exceed 3812CB	Vistamaxx 6000	ExxonMobil LDPE252	Test method* (based on)	Unit
Melt index (190°C/2.16 kg)	3.5	4.5	3.5	3.8	3.7	3.8	ASTM D1238	g/10 min
Density	0.916	0.936	0.918	0.912	0.889	0.923	ASTM D1505	g/cm ³

* For detailed product information, please consult the individual grade data sheet, available on our website: www.exxonmobilchemical.com. Values given are typical and should not be interpreted as specifications. Data generated by or on behalf of ExxonMobil Chemical.

ExxonMobil
K2022
microsite:



Advancing sustainable solutions. Together.


For more information: exxonmobilchemical.com/pe
ExxonMobil Hub EN11

©2022 ExxonMobil. ExxonMobil, the ExxonMobil logo, the interlocking "X" device and other product or service names used herein are trademarks of ExxonMobil, unless indicated otherwise. This document may not be distributed, displayed, copied or altered without ExxonMobil's prior written authorization. To the extent ExxonMobil authorizes distributing, displaying and/or copying of this document, the user may do so only if the document is unaltered and complete, including all of its headers, footers, disclaimers and other information. You may not copy this document to or reproduce it in whole or in part on a website. ExxonMobil does not guarantee the typical (or other) values. Any data included herein is based upon analysis of representative samples and not the actual product shipped. The information in this document relates only to the named product or materials when not in combination with any other product or materials. We based the information on data believed to be reliable on the date compiled, but we do not represent, warrant, or otherwise guarantee, expressly or impliedly, the merchantability, fitness for a particular purpose, freedom from patent infringement, suitability, accuracy, reliability, or completeness of this information or the products, materials or processes described. The user is solely responsible for all determinations regarding any use of material or product and any process in its territories of interest. We expressly disclaim liability for any loss, damage or injury directly or indirectly suffered or incurred as a result of or related to anyone using or relying on any of the information in this document. This document is not an endorsement of any non-ExxonMobil product or process, and we expressly disclaim any contrary implication. The terms "we," "our," "ExxonMobil Product Solutions" and "ExxonMobil" are each used for convenience, and may include any one or more of ExxonMobil Product Solutions Company, Exxon Mobil Corporation, or any affiliate either directly or indirectly stewarded.

Cast stretch film line technology.

MAIN TECHNICAL FEATURES

- Can work with jumbos from 400 up to 1,000 mm wide.
- Separately adjustable multiple roller pre-stretching system (patented)
- Adjustable neck-in control. (patented)
- Automatic diameter control of produced rolls, more or less fluffy rolls. (patented) .
- Residual elastic memory control.
- Stretch film prestretched down to 4 microns up to 1.100 meters per minute.
- Up to 150 rolls per hour in 600 meters, independently of thickness.
- Prestretched rolls with extended core, up to 600 mm. wide.



Colines S.p.A. at K2022:

Hall 16/A39

For more information: www.colines.it