



ExxonMobil™ Exceed™ Exceed™ Flow Exceed™ Stiff+
Exceed™ Tough Exceed™ Tough+ Vistamaxx™ Escorez™

Not all hygiene solutions are created equal

Soft and strong.
Comfortable, secure and discreet.
High-performing, drop-in solutions.

Together with industry-leading partners, ExxonMobil can be your single source for innovative nonwoven, adhesive and film solutions that meet market needs while driving production efficiency and delivering sustainability benefits.



Consistency
Products that ensure processability and end product performance



Supply reliability
bolstered by world-scale manufacturing sites



Broad Portfolio Comprehensive collection of solutions to meet evolving market needs



Technical support
Dedicated global team to support continuous innovation

We would like to thank all of our valuable partners for collaborating with us on this sample.

High performance diaper solutions

Top sheet Nonwoven

Unlock new levels of softness for top sheets with greater comfort with Vistamaxx™ performance polymers in combination with Exceed™ high performance and ExxonMobil™ PP. Deliver on both loft and soft when combining these resins to tailor fabric hand feel from cushiony and cottony to smooth and drapable to suit your unique global market needs.

Backsheet films

Create new possibilities for comfort and discretion with Exceed XP, Exceed, and Enable performance PE polymers for thinner and softer breathable and non-breathable backsheet films with excellent machinability.

Elastic stretch ears

Enhance comfort and tailor fit with soft stretch elastic films made from Vistamaxx performance polymers.

Backsheet Nonwoven

Unlock new levels of softness for backsheets with greater comfort with Vistamaxx performance polymers in combination with Exceed high performance PP and ExxonMobil PP. Deliver on both loft and soft when combining these resins to tailor fabric hand feel from cushiony and cottony to smooth and drapable to suit your unique global market needs.

Leg cuffs

Enhance security with no leakage leg cuffs by leveraging Exceed high performance PP meltblown to facilitate superior barrier performance with balanced strength and softness.

Core wrap


Facilitate core integrity with ExxonMobil PP consistent, high quality spunbond fabrics.

Core wrap





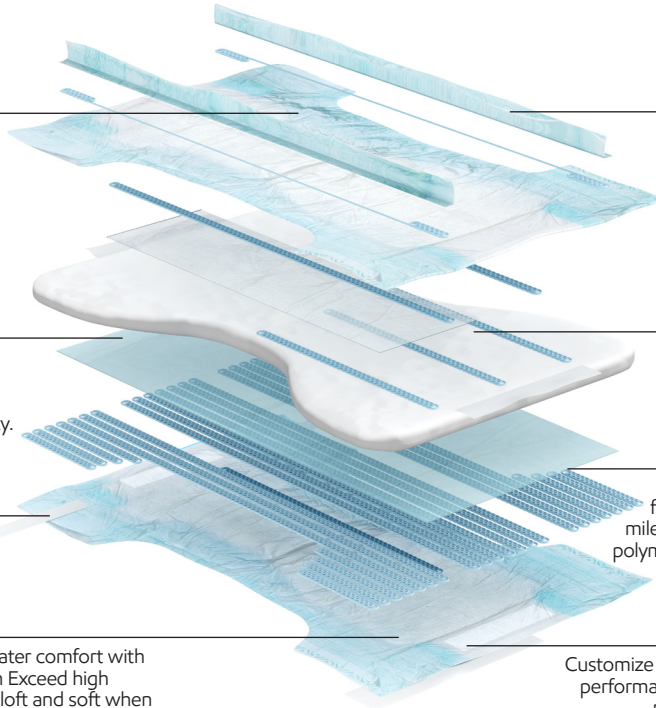


Develop hygiene hot melt adhesive formulations that have low odor and high mileage when using Vistamaxx performance polymers and Escorez™ tackifiers which enable higher polymer loading formulations.

Elastic waistbands

Customize elasticity for improved fit with Vistamaxx performance polymers in extensible or fully elastic nonwovens or soft stretch film laminates.













Benefits

| | | | | | | |
|---|--|--|--|--|---|---|
|  No leakage |  Breathability |  Versatility |  Downgauging potential |  Balanced softness and strength |  Improved comfort |  Easy film processing |
|---|--|--|--|--|---|---|

Hygiene compression packaging films with sustainable benefits

Opportunities include downgauging the film to help reduce material use, incorporating recycled content and developing mono-material solutions that can be recycled in communities with programs and facilities in place that collect and recycle plastic film.

| | | | | |
|--|--|--|---|--|
|  Incorporation of recycled content |  Film integrity |  Optical properties |  Excellent package integrity & high gloss |  Excellent toughness/stiffness balance |
|  Reduced film thickness |  Significant downgauging potential |  Easy processing and higher output |  Excellent sealing performance |  Opportunities for cost savings |

ExxonMobil performance polyethylene grades like Exceed™ XP and Enable™ boost film performance

- Ultra thin film, downgauged to 40 microns
- Using Exceed XP 8358ML can help provide high integrity films with outstanding toughness and puncture resistance.
- Enable 4002MC delivers tough, stiff films for better handling, especially at reduced thicknesses.
- Possibility to incorporate up to 30% recycled content in the middle layer, while still keeping film thickness in 50 microns, and great film toughness thanks to Exceed XP performance boost.
- The use of HDPE also offers stiffness, and a higher tensile yield delivers resistance to deformation during and after packaging.



What's new: ExxonMobil Signature Polymers

All our polymers are now positioned under a single portfolio brand: Signature Polymers. The aim is to simplify our product architecture and naming to improve portfolio navigation for you. We would like to stress that our commitment to high quality products remains the same, it is the names that change. Everything else remains the same. We will be making these modifications over the next six months so you will see both old and new grade names highlighted during that time. Here's a quick overview of brands and grade names that will be changed in this document:

| Legacy commercial name | New commercial name |
|------------------------|--------------------------|
| Exceed™ XP 8358ML | Exceed™ Tough+ m 0518.ML |
| Enable™ 4002MC | Exceed™ Stiff+ m 0238.MC |

Want to see what's changed in our portfolio? Go to exxonmobilchemical.com/sptransform



Hygiene and personal care solutions



Compression packaging solutions

Contact us for more information: exxonmobilchemical.com/loft

ExxonMobil
Signature Polymers

Bring your impossible



©2024 ExxonMobil. ExxonMobil, the ExxonMobil logo, the interlocking "X" device and other product or service names used herein are trademarks of ExxonMobil, unless indicated otherwise. This document may not be distributed, displayed, copied or altered without ExxonMobil's prior written authorization. To the extent ExxonMobil authorizes distributing, displaying and/or copying of this document, the user may do so only if the document is unaltered and complete, including all of its headers, footers, disclaimers and other information. You may not copy this document to or reproduce it in whole or in part on a website. ExxonMobil does not guarantee the typical (or other) values. Any data included herein is based upon analysis of representative samples and not the actual product shipped. The information in this document relates only to the named product or materials when not in combination with any other product or materials. We based the information on data believed to be reliable on the date compiled, but we do not represent, warrant, or otherwise guarantee, expressly or impliedly, the merchantability, fitness for a particular purpose, freedom from patent infringement, suitability, accuracy, reliability, or completeness of this information or the products, materials or processes described. The user is solely responsible for all determinations regarding any use of material or product and any process in its territories of interest. We expressly disclaim liability for any loss, damage or injury directly or indirectly suffered or incurred as a result of or related to anyone using or relying on any of the information in this document. This document is not an endorsement of any non-ExxonMobil product or process, and we expressly disclaim any contrary implication. The terms "we," "our," "ExxonMobil Product Solutions" and "ExxonMobil" are each used for convenience, and may include any one or more of ExxonMobil Product Solutions, Exxon Mobil Corporation, or any affiliate either directly or indirectly stewarded.