



Exceed™ Vistamaxx™

# Creating Machine Wrap stretch film incorporating up to 30% post-consumer recycled (PCR) content while maintaining performance



Incorporates recycled content



Maintains mechanical performance



Reduced gel impact



Improved wrapper consistency

Data and results presented herein apply specifically to the noted application under this fact sheet. Your results may differ depending on factors such as operating conditions, equipment and materials used.

## Challenge

### Incorporate PCR content while maintaining stretch film performance

Traditional LLDPE-based solutions can provide moderate pallet stability, with little to no downgauging possibility without adding a booster such as performance polyethylene. These type of films are often unable to incorporate recycled content while maintaining mechanical performance.

“Customers can struggle to incorporate PCR into their stretch wrap solutions,” said Marie-Paule Van Den Eede, PE Technology, Customer and Application Developer, ExxonMobil. “PCR feedstock typically contains LDPE, which can be detrimental to stretch film performance due to a potential reduction in stretchability, which can compromise film end-use properties. In addition, PCR typically exhibits gels, which can be detrimental to stretch film performance due to the potential creation of holes and reduced stretchability. A C4-LLDPE-based formulation incorporating PCR may not deliver the film and end-use level of performance required for machine wrap stretch films. We were eager to propose a potential solution that could overcome these challenges.”

## Solution

### ExxonMobil performance polymers for improved mechanical performance and improved wrapper consistency

ExxonMobil offers performance polymers that can allow the delivery of high-end Machine Wrap stretch film solutions incorporating up to 30% PCR while maintaining performance.

#### Exceed™ 3812CB performance polymer as an excellent PCR blend partner and booster grade

- Higher melt index and lower density (vs reference performance PE (0.918 g/cm<sup>3</sup>; 3.5 g/10 min)), exhibiting improved mechanical performance and processing capability
- Especially suited as a blend partner with PCR content
- Acts as a gel grinder, reducing the impact of gels and helping improve wrapper consistency

#### Vistamaxx™ 6000 performance polymer functional layer as a consistency booster

- Metallocene catalyzed copolymer that can provide improved ultimate stretch, tear propagation resistance and wrapper consistency
- Can be used pure in a functional layer of 10-15% (of the overall structure), while maintaining full compatibility with PE flexible film recycling streams<sup>1</sup>

<sup>1</sup> The terms “recyclable” and “recyclability” are intended to refer to the potential for recyclability of packaging solutions designed and manufactured in accordance with recycling guidelines such as RecyClass (<https://www.recyclclass.eu/>) and are limited to Europe. Ultimate recyclability of packaging incorporating ExxonMobil’s performance PE resins will depend on a number of factors outside of ExxonMobil’s control including, but not limited to, availability of programs and facilities that collect and recycle plastic packaging within a given community. Any and all claims about the recyclability of packaging are the sole responsibility of the packaging manufacturer. <https://recyclclass.eu/wp-content/uploads/2024/03/2023-PO-011012-vf.pdf>

## Results

Incorporating up to 30% PCR into a high-end machine wrap stretch film was achieved with the incorporation of performance polyethylene, which helped to maintain mechanical properties

ExxonMobil testing indicated that C4-LLDPE-based formulations with the incorporation of PCR performed poorly. A C4-LLDPE-based formulation may not deliver the film and end-use level of performance required unless high-quality recycled content is used.

When testing ultimate stretch force, C4-LLDPE film with 20% PCR broke earlier than the reference solution without PCR. The C4-LLDPE film with 20% PCR also performed poorly in consistency testing.

“The results help to emphasize the important role that ExxonMobil performance polyethylene can play when incorporating PCR,” said Marie-Paule. “In this example, replacing C4-LLDPE with Exceed™ 3812 as a booster grade and PCR blend partner helped to maintain mechanical performance and wrapper consistency for machine wrap stretch films.”

**Introducing Vistamaxx™ performance polymer 6000 for higher wrapper consistency, which can be used pure in a functional layer of 10-15% of the overall film structure**



“Hole formation is often due to the presence of gels, even if a hole appears during film application (i.e., stretching),” said Marie-Paule. “The functional layer of Vistamaxx™ 6000 can act as a wrapper consistency booster and help prevent further hole tear propagation.”

Therefore, Vistamaxx 6000 performance polymer in the functional layer can offer the following potential benefits:

- Wrapper consistency
- Maintained packaging integrity and performance
- Full compatibility with European PE flexible film recycling streams per RecyClass certification in amounts up to 15% of the total structure<sup>1</sup>




### FPT Ultimate Stretch Force (at 4m/s)

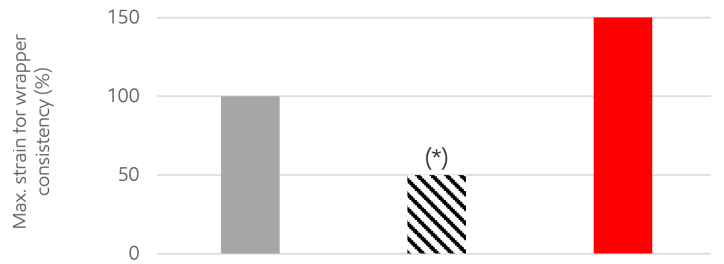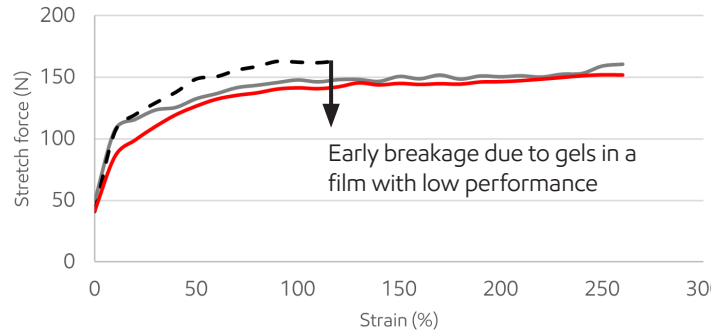

(\*) Hole formation during test

	C4 LLDPE reference 17 µm	C4 LLDPE + 20% PCR 17 µm	Exceed™ 3812 performance polymer + 20% PCR 17 µm
Ratio	1 / 8 / 1	1 / 8 / 1	1 / 8 / 1
Anti-cling	100% LL1004AY	100% LL1004AY	100% LL1004AY
Core	100% LL1004AY	100% LL1004AY 25% PCR2	75% Exceed™ 3812CB 25% PCR2
Cling	95% LL1004AY 5% Vistamaxx™ 6202	95% LL1004AY 5% Vistamaxx™ 6202	95% LL1004AY 5% Vistamaxx™ 6202

### FPT Ultimate Stretch Force (at 4m/s)

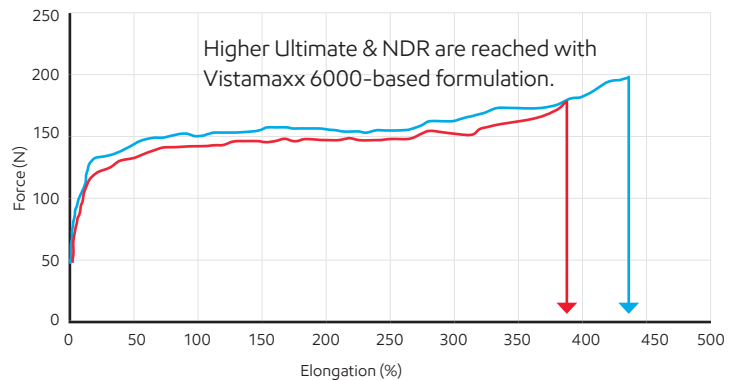

#### Formulation

- Exceed™ 3812 performance PE-based structure incorporating 30% PCR
- Exceed™ 3812 performance PE-based structure incorporating 30% PCR and with Vistamaxx™ 6000 as functional layer

#### Wrapping consistency %

- 200%
- 250%

<sup>1</sup> The terms “recyclable” and “recyclability” are intended to refer to the potential for recyclability of packaging solutions designed and manufactured in accordance with recycling guidelines such as RecyClass (<https://www.recyclass.eu/>) and are limited to Europe. Ultimate recyclability of packaging incorporating ExxonMobil’s performance PE resins will depend on a number of factors outside of ExxonMobil’s control including, but not limited to, availability of programs and facilities that collect and recycle plastic packaging within a given community. Any and all claims about the recyclability of packaging are the sole responsibility of the packaging manufacturer. <https://recyclass.eu/wp-content/uploads/2024/03/2023-PO-011012-vf.pdf>


## In summary

### Performance polymer-based Machine Wrap solutions incorporating up to 30% PCR


Up to  
200-250%\*

Increasing  
average  
stretch  
150~200%\*

17 - 23  $\mu\text{m}$



Exceed™ 3812CB performance polymer and Vistamaxx™ 6000 performance polymer-based solution



Exceed™ 3812CB performance polymer-based solution

ExxonMobil performance polymer-based solutions incorporating up to 30% PCR can:

- Reduce impacts from gels!
- Improve wrapper consistency

\*Depending on PCR quality, extruder and cast line configuration and settings

■ ExxonMobil™ LLDPE cast ■ Vistamaxx™ 6102/6202 ■ Exceed™ 3812CB ■ Vistamaxx™ 6000 ■ PCR

Contact us for more information: [exxonmobilchemical.com/pe](https://www.exxonmobilchemical.com/pe)

Test item	Test method
Ultimate strain	FPT-750 equipment: 30 N unwind force, -4% wind strain, 4000 mm/s line velocity, W stretch pattern
Gel count (by consistency test)	50 m of unstretched film on FPT-750 equipment: 30 N unwind force, 0% pre-stretch, 5% wind strain, 4000 mm/s line velocity, W stretch pattern, gray value 140
Wrapper consistency	50 m of unstretched film on FPT-750 equipment: 30 N unwind force, 5% wind strain, W-stretch pattern. Wrapper velocity of 50 wraps/min at 100% 150%, 200%, or 250% pre-stretch; 3 times no film break is seen as a successful test
Melt index	(190°C / 2.16 kg) – based on ASTM D1238
Density / specific gravity	Based on ASTM D792

All data in this document have been tested by or on behalf of ExxonMobil

**ExxonMobil**  
Signature Polymers

Bring your impossible



© 2024 ExxonMobil. ExxonMobil, the ExxonMobil logo, the interlocking "X" device and other product or service names used herein are trademarks of ExxonMobil, unless indicated otherwise. This document may not be distributed, displayed, copied or altered without ExxonMobil's prior written authorization. To the extent ExxonMobil authorizes distributing, displaying and/or copying of this document, the user may do so only if the document is unaltered and complete, including all of its headers, footers, disclaimers and other information. You may not copy this document to or reproduce it in whole or in part on a website. ExxonMobil does not guarantee the typical (or other) values. Any data included herein is based upon analysis of representative samples and not the actual product shipped. The information in this document relates only to the named product or materials when not in combination with any other product or materials. We based the information on data believed to be reliable on the date compiled, but we do not represent, warrant, or otherwise guarantee, expressly or impliedly, the merchantability, fitness for a particular purpose, freedom from patent infringement, suitability, accuracy, reliability, or completeness of this information or the products, materials or processes described. The user is solely responsible for all determinations regarding any use of material or product and any process in its territories of interest. We expressly disclaim liability for any loss, damage or injury directly or indirectly suffered or incurred as a result of or related to anyone using or relying on any of the information in this document. This document is not an endorsement of any non-ExxonMobil product or process, and we expressly disclaim any contrary implication. The terms "we," "our," "ExxonMobil Product Solutions" and "ExxonMobil" are each used for convenience, and may include any one or more of ExxonMobil Product Solutions Company, Exxon Mobil Corporation, or any affiliate either directly or indirectly stewarded.

## What's new: ExxonMobil Signature Polymers

All our polymers are now positioned under a single portfolio brand: Signature Polymers. The aim is to simplify our product architecture and naming to improve portfolio navigation for you. We would like to stress that our commitment to high quality products remains the same. The composition of the products are unchanged, it is only the names that updated. We will be making these modifications over the next few months, through mid 2025, so you will see both old and new grade names highlighted during that time.

Here's a quick overview of brands and grade names that will be changed in this document:

<b>Legacy Commercial Name</b>	<b>New Commercial Name</b>
Exceed™ 3812 CB	Exceed™ Tough m 3812.CB

Want to see what's changed in our portfolio? Go to [exxonmobilchemical.com/sptransform](https://exxonmobilchemical.com/sptransform)