

High-performance metal extraction diluents for lithium-ion battery recycling

With the continued growth in electric vehicle (EV) adoption, it's estimated that 2 million tons of lithium-ion batteries will be available for recycling by 2030¹. Recycling offers an end-of-life option for used EV batteries by extracting valuable metals that can then be re-deployed.



Efficient recovery

Minimal diluent and extractant with consistent performance



Higher production rate

Enabled with faster separation speed



Global scalability

Enabling quick global ramp up of operations and quality consistency

Solvent extraction is a highly effective approach for recovering metals from EV batteries, enabling ...

metal recovery rates of **90+%** with **95+%** purity²

High purity, quality consistency, improved safety and a global supply make Escaid™ diluents an excellent choice for solvent extraction processes³.

Low viscosity, high density, and low aromatics content significantly impact the phase separation time.

40% faster separation speed.

Escaid™ diluents are used for the solvent extraction of rare earth and noble metals including copper, nickel, cobalt, uranium and zinc. The Escaid portfolio features grades with narrow boiling ranges, low viscosities, high flash points, and low evaporation rates. Escaid products offer the right balance of good flow and phase separation with minimal diluent and extractant losses.⁴

¹ Source: Bloomberg New Energy Finance (BNEF) – "Lithium-Ion Battery Recycling: 2 million tons by 2030". Jan 7th 2019.

² Recovery rate and purity dependent on system variables. Source: Chagnesa A, Pospiech B – "A brief review on hydrometallurgical technologies for recycling spent lithium-ion batteries". Journal of Chemical Technology and Biotechnology. 88: 1191-1199 (2013)

³ Source: <https://www.exxonmobilchemical.com/en/solutions-by-industry/industrial-applications/metal-solvent-extraction>, "Selecting the right diluent" PDF

⁴ Source: <https://www.exxonmobilchemical.com/en/solutions-by-industry/industrial-applications/metal-solvent-extraction>, "High-performance diluents for metal extraction" PDF brochure

Range of solutions

ExxonMobil is a leading global supplier in the solvent extraction market, with a diluent product slate that enables custom solutions for optimized performance across a wide range of operating temperatures and conditions. Escaid™ 110 has been the diluent of choice in the solvent extraction market for decades, and is well-suited for EV battery recycling. Contact your ExxonMobil sales representative for more information on our products.

Key properties*	Escaid 110 fluid ¹	Escaid 120 fluid ²
Distillation range (°C) ³	207 - 240	235 - 265
Aromatics content (% wt) ⁴	< 0.01	< 0.1
Viscosity at 25°C (cSt) ⁵	2.1	3.16
Flash point (°C) ⁶	82	103
Density at 15°C (kg/dm ³) ⁷	0.795	0.822
Occupational exposure limit ³ (mg/m ³) ⁸	1200	1200

Source: Data from tests performed by or on behalf of ExxonMobil.

*All data provided are typical from latest FAAG: (1) Singapore typical; (2) Antwerp typical. Test methods: (3) Distillation Range: Method "ASTM D86" for all grades; (4) Aromatics content: flash kerosene - Method "AMS 140.31" for Escaid 110 - Method "EM Test method UV1" for Escaid 120 and 120 ULA; (5) Viscosity at 25 C: Method "ASTM D445" for Escaid 110 - Method "ASTM D7042" for Escaid 120 and Escaid 120 ULA; (6) Flash Point: Methods "ASTM D93" for all grades; (7) Density at 15C: "ASTM D4052" for Escaid 110 and method "ISO 12185" for Escaid 120; (8) Source for Occupational Exposure Limits: RCP - TWA - ExxonMobil data.

Performance comparison with a commercial product

Kinematic viscosity and Aromatics content impact the phase separation time.

Property	Impact	Escaid™ 110 Diluent (typical values)	Comp. 1*
Aromatics (wt%) UV/GC	Toxicity/ performance (odor, polarity, entrainment loss, phase separation, oxidation)	0.001	0.022
Kinematic viscosity 40°C, cSt, ASTM D445	Entrainment losses, fluidity, phase separation	1.60	2.26
Bromine index mg/100g, ASTM D2710	Inert/reactivity	<1	5
Aniline point, °C, ASTM D611	Solubility	76	92


*Based on single sample test in a third party lab on comparative fluid provided by customer

Opportunity to increase production rate and manufactory efficiency


Low viscosity, high density, and low aromatics content collectively contribute to a shorter phase separation time, which leads to improved overall efficiency. Faster phase separation time was observed in trials with Escaid™ 110 Diluent. Furthermore, global supply also ensure that the benefits of optimized phase separation are fully realized.

Faster phase separation time was observed in trials with Escaid™ 110 Diluent (19s) ⁽¹⁾,

40% faster than the result by using the Comp. 1 (31s).⁽²⁾⁽³⁾

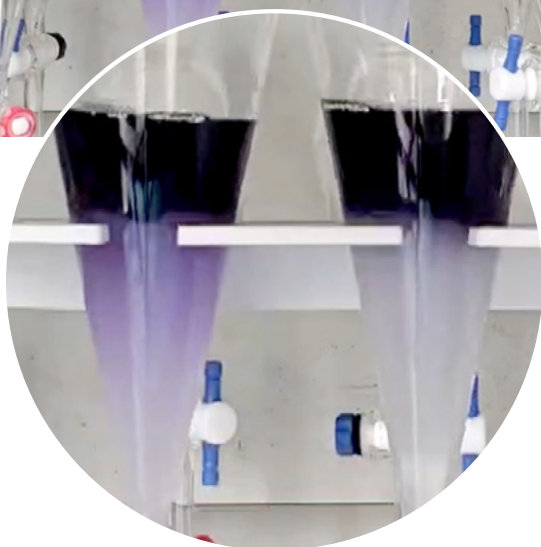

Phase separation time, seconds

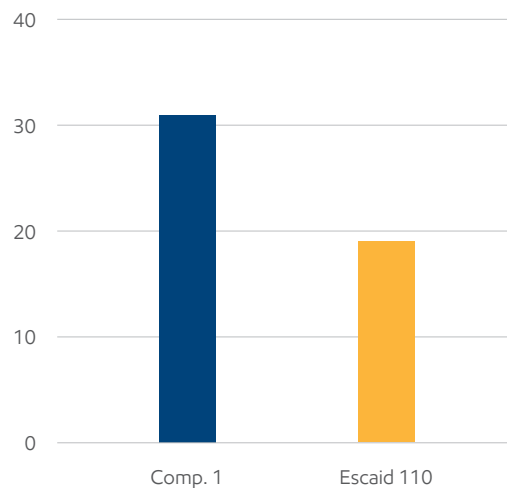

(1) Standard Deviation for 4 repeated tests: 8s

(2) Standard Deviation for 4 repeated tests: 13s.

(3) In scaled up production the performance may differ due to various factors



Have a technical question?

Connect directly with our technical experts at [exxonmobilchemical.com/AnswerPerson](https://www.exxonmobilchemical.com/AnswerPerson)

©2025 ExxonMobil. ExxonMobil, the ExxonMobil logo, the interlocking "X" device and other product or service names used herein are trademarks of ExxonMobil, unless indicated otherwise. This document may not be distributed, displayed, copied or altered without ExxonMobil's prior written authorization. To the extent ExxonMobil authorizes distributing, displaying and/or copying of this document, the user may do so only if the document is unaltered and complete, including all of its headers, footers, disclaimers and other information. You may not copy this document to or reproduce it in whole or in part on a website. ExxonMobil does not guarantee the typical (or other) values. Any data included herein is based upon analysis of representative samples and not the actual product shipped. The information in this document relates only to the named product or materials when not in combination with any other product or materials. We based the information on data believed to be reliable on the date compiled, but we do not represent, warrant, or otherwise guarantee, expressly or impliedly, the merchantability, fitness for a particular purpose, freedom from patent infringement, suitability, accuracy, reliability, or completeness of this information or the products, materials or processes described. The user is solely responsible for all determinations regarding any use of material or product and any process in its territories of interest. We expressly disclaim liability for any loss, damage or injury directly or indirectly suffered or incurred as a result of or related to anyone using or relying on any of the information in this document. This document is not an endorsement of any non-ExxonMobil product or process, and we expressly disclaim any contrary implication. The terms "we," "our," "ExxonMobil Product Solutions" and "ExxonMobil" are each used for convenience, and may include any one or more of ExxonMobil Product Solutions Company, Exxon Mobil Corporation, or any affiliate either directly or indirectly stewarded.

