



ExxonMobil™ PP

## Low odor, flavor transfer thin-wall injection molding food packaging with ExxonMobil™ PP



**Low odor**  
Low odor and  
flavor transfer



**Cost savings**  
Cost reduction  
opportunities



**Improved aesthetics**  
Improved finished  
product aesthetics

ExxonMobil™ PP7555KNE2 is a high impact copolymer resin (MFR 50 g/10 min) with low odor and flavor transfer characteristics ideal for thin-wall injection molding (TWIM) food applications.

Containers and cups made from this resin can be used for:

- Hot-fill applications
- Packaging food products stored at room temperature and in refrigerated conditions

### Typical TWIM food packaging applications using ExxonMobil™ PP7555KNE2 include

- Dairy product containers
- Drinking cups
- Instant noodle cups
- Hot-filled food containers and cups
- Biscuit trays

### Cost reduction opportunities

Providing a combination of high melt flow, fast crystallization rate and easy mold release, the resin offers opportunities to improve cycle time and increase productivity.

### Improved finished parts

Because of the resin's anti-static property, finished products exhibit reduced dust accumulation for improved hygiene and enhanced shelf appeal.


ExxonMobil™ PP7555KNE2 provides outstanding impact strength to improve package integrity and durability.

## Compared to industry grades, ExxonMobil™ PP7555KNE2 offers

- Higher melt flow with significantly faster crystallization opportunities for reduced cycle times, increased production rates and reduced costs
- Excellent impact strength for highly durable products
- Low odor and flavor transfer matching industry benchmark



## Selected property data for ExxonMobil™ PP7555KNE2 and industry reference benchmark

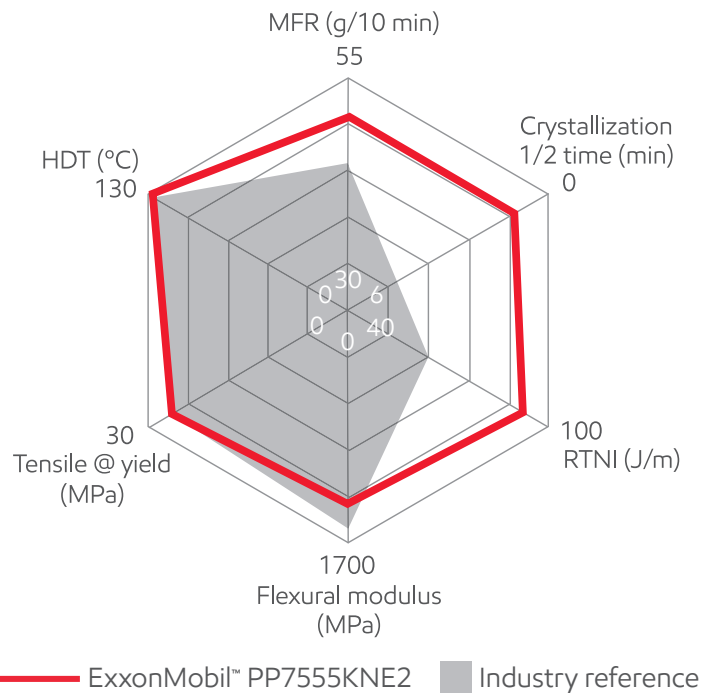

\* Axis scale for crystallization 1/2 time is reversed. Lower value means shorter crystallization 1/2 time.

## Typical properties

ExxonMobil™ PP7555KNE2	Test conditions	Test based on ASTM method	Units	Typical value
Melt flow rate (MFR)	230°C/2.16 kg	D1238	g/10 min	50
Tensile strength at yield	51 mm/min	D638	MPa	25
Flexural modulus - 1% secant	1.3 mm/min	D790A	MPa	1340
Heat deflection temperature (HDT)	0.45 MPa - annealed	D648	°C	119
Notched Izod impact (RTNI)	23°C	D256A	J/m	94

Values given are typical and should not be interpreted as specifications. Data generated by or on behalf of ExxonMobil. ExxonMobil PP7555KNE2 is cleared for food contact applications. Contact your ExxonMobil representative for potential food contact application compliance (e.g. FDA, EU, HPFB).

Contact us for more information: [exxonmobilchemical.com/pp](http://exxonmobilchemical.com/pp)

**ExxonMobil**  
Signature Polymers

Bring your impossible



©2024 ExxonMobil. ExxonMobil, the ExxonMobil logo, the interlocking "X" device and other product or service names used herein are trademarks of ExxonMobil, unless indicated otherwise. This document may not be distributed, displayed, copied or altered without ExxonMobil's prior written authorization. To the extent ExxonMobil authorizes distributing, displaying and/or copying of this document, the user may do so only if the document is unaltered and complete, including all of its headers, footers, disclaimers and other information. You may not copy this document to or reproduce it in whole or in part on a website. ExxonMobil does not guarantee the typical (or other) values. Any data included herein is based upon analysis of representative samples and not the actual product shipped. The information in this document relates only to the named product or materials when not in combination with any other product or materials. We based the information on data believed to be reliable on the date compiled, but we do not represent, warrant, or otherwise guarantee, expressly or impliedly, the merchantability, fitness for a particular purpose, freedom from patent infringement, suitability, accuracy, reliability, or completeness of this information or the products, materials or processes described. The user is solely responsible for all determinations regarding any use of material or product and any process in its territories of interest. We expressly disclaim liability for any loss, damage or injury directly or indirectly suffered or incurred as a result of or related to anyone using or relying on any of the information in this document. This document is not an endorsement of any non-ExxonMobil product or process, and we expressly disclaim any contrary implication. The terms "we," "our," "ExxonMobil Product Solutions" and "ExxonMobil" are each used for convenience, and may include any one or more of ExxonMobil Product Solutions, Exxon Mobil Corporation, or any affiliate either directly or indirectly stewarded.