

Enhance the performance of your waterproofing membranes



Vistamaxx™ performance polymers allow you to improve the performance of your waterproofing membranes. Adding Vistamaxx to your formulations enables the fabrication of more flexible membranes that are easier to install. Seam force and peel strength can also be enhanced for more durable membranes.



Easier installation

Adding Vistamaxx performance polymers to your formulation increases membrane flexibility, making installation easier and faster with little maintenance.



Strength and durability

When Vistamaxx is added to your formulations, it broadens the membrane welding window, while simultaneously improving seam force and peel strength. This stabilizes welding speed for easier membrane installation and offers excellent welding strength for durability.



Cost saving opportunities

Using Vistamaxx allows higher filler loadings and good filler dispersion, resulting in opportunities to reduce costs and better membrane sheet consistency.




Tailoring TPO membrane solutions for better flexibility and strength

Adding Vistamaxx to the formulation enhances the flexibility of your membranes, making them easier to install. Vistamaxx can also be used to tailor the tensile strength and elongation at break for more durable membranes.

TPO membranes typical formulation

Components	Weight %
Polymer: Vistamaxx™ 6102 and ExxonMobil™ PP7032 (PP content: % of total polymer)	60 (30-40)
Magnesium hydroxide masterbatch (flame retardant)	30
UV stabilizer masterbatch	3
Titanium dioxide (TiO ₂) masterbatch	7

Figure 1: Enhanced compounding flexibility

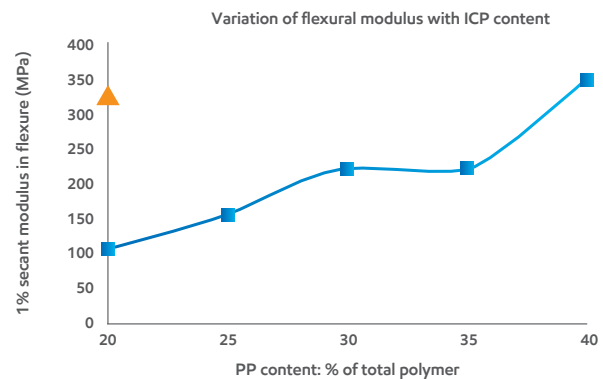


— Vistamaxx™ + ICP ▲ Market reference

Test method: based on ASTM D790

- Better flexibility versus the market reference leads to easier installation
- Modulus targets can be attained by varying the PP content in the blend

Figure 2: Tailored strength and elongation at break

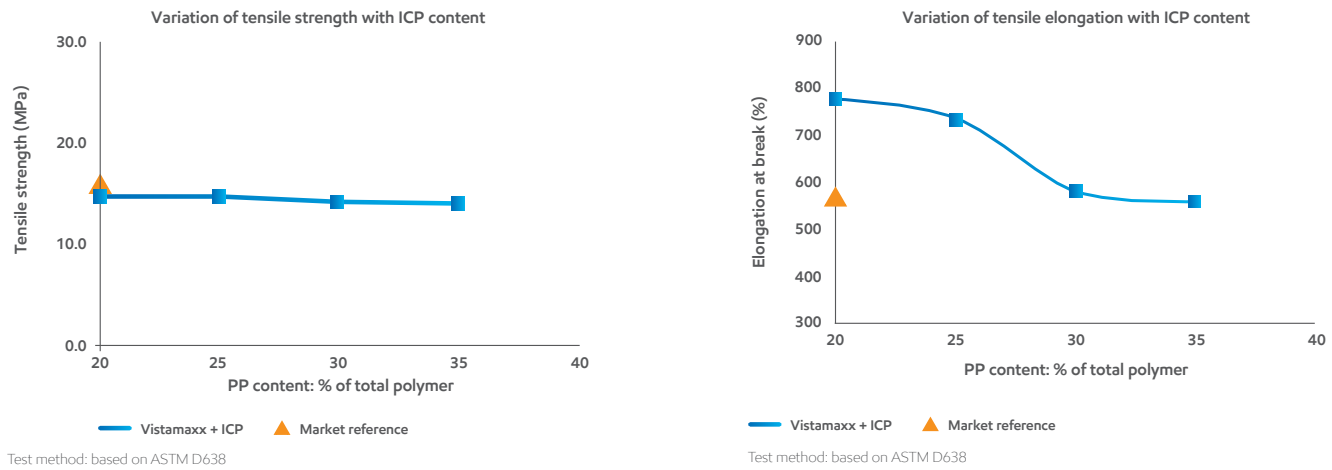


- Tensile strength similar to the market reference with better elongation at break
- Properties can be tailored by adjusting the ratio of Vistamaxx™ performance polymers and ICP PP

Enhanced solutions for PE membranes with better flexibility

Adding Vistamaxx as a blend partner to PE-based formulations improves membrane flexibility for easier installation and provides good tear strength for durability.

Figure 3: Vistamaxx performance polymers for PE-based membranes

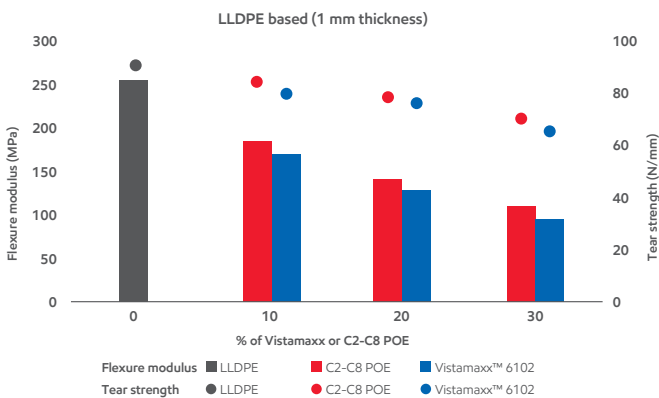

- Adding 10% Vistamaxx™ 6102 reduces flexure modulus by about 33% versus LLDPE
- Vistamaxx 6102 provides better flexibility and comparable tear strength versus C2-C8 POE

Formulation used for figure 3

Components	Weight %
LLDPE	80-50
Vistamaxx™ 6102 or C2-C8 POE	0-30
Calcium carbonate powder	20

©2024 ExxonMobil. ExxonMobil, the ExxonMobil logo, the interlocking "X" device and other product or service names used herein are trademarks of ExxonMobil, unless indicated otherwise. This document may not be distributed, displayed, copied or altered without ExxonMobil's prior written authorization. To the extent ExxonMobil authorizes distributing, displaying and/or copying of this document, the user may do so only if the document is unaltered and complete, including all of its headers, footers, disclaimers and other information. You may not copy this document to or reproduce it in whole or in part on a website. ExxonMobil does not guarantee the typical (or other) values. Any data included herein is based upon analysis of representative samples and not the actual product shipped. The information in this document relates only to the named product or materials when not in combination with any other product or materials. We based the information on data believed to be reliable on the date compiled, but we do not represent, warrant, or otherwise guarantee, expressly or impliedly, the merchantability, fitness for a particular purpose, freedom from patent infringement, suitability, accuracy, reliability, or completeness of this information or the products, materials or processes described. The user is solely responsible for all determinations regarding any use of material or product and any process in its territories of interest. We expressly disclaim liability for any loss, damage or injury directly or indirectly suffered or incurred as a result of or related to anyone using or relying on any of the information in this document. This document is not an endorsement of any non-ExxonMobil product or process, and we expressly disclaim any contrary implication. The terms "we," "our," "ExxonMobil Chemical," "ExxonMobil Product Solutions" and "ExxonMobil" are each used for convenience, and may include any one or more of ExxonMobil Product Solutions Company, Exxon Mobil Corporation, or any affiliate either directly or indirectly stewarded.