



Exceed™ Tough+

Exceed™ Flow+

Exceed™ Stiff+

Exxtra™ Seal

Full PE pouches recycled* to create new pouches



Designed for
recyclability*



Uses up to
30% recycled
PE pouch film



Maintains packaging
integrity and optical
properties

Challenge

Include recycled PE laminated stand-up pouches (SUPs) in new full PE SUPs

As part of its commitment to helping customers create sustainable solutions, ExxonMobil wanted to develop full polyethylene (PE) stand-up pouches (SUPs) that include recycled PE content from used PE pouches.

In creating a sustainable solution, the challenge was to ensure that the performance of the new SUPs that include recycled material was maintained. By doing so, materials can be kept in the value chain longer, helping to reduce waste.

- Create new full PE pouches from used full PE pouches
- Use up to 30% recycled PE pouch film
- Maintain packaging integrity and optical properties

Solution

Incorporates up to 30% recycled full PE SUP content and maintains packaging integrity and optical properties

A collaboration between **Hosokawa Alpine AG**, **EREMA Engineering Recycling Maschinen und Anlagen GmbH**, **Henkel AG & Co KGaA Company** and ExxonMobil has developed a solution that uses recycled full PE laminated SUPs to manufacture new full PE laminated SUPs.

PE pouches can be recycled into new pouches

Replacing conventional multi-material structures, full PE laminated SUPs can be easily recycled where programs and facilities to collect and recycle plastic films exist.

Placed in the PE sealant film layer, the recycled PE laminated SUP content is used in combination with **Exceed™ Tough+**, **Exceed™ Stiff+**, **Exceed™ Flow+** and **Exxtra™ Seal performance PE polymers** to manufacture new SUPs, helping customers create sustainable solutions.

Pouches contain up to 30% recycled PE pouch film

Once the SUP packages have been used and collected, **INTAREMA® TVEplus® technology from EREMA Engineering Recycling** combines filtration, homogenization and degassing in a single, effective step. The result is high-quality recycled PE material that can be used in new laminated SUP packaging for non-food applications.

*Recyclable in the few communities that have programs in place to collect and recycle plastic film



**HOSOKAWA
ALPINE**

EREMA®



PE MDO film – optics/stiffness through high orientation processing

Fabricating full PE SUP films on **Hosokawa Alpine MDO film lines with TRIO technology** delivers enormous value. High orientation allows the film properties to be optimized to meet specific SUP requirements for optical (gloss and haze) and stiffness properties.

By stretching the films, which contain performance PE polymers (Table 1), on MDO lines with TRIO technology the mechanical and optical properties can be tailored to meet the needs of the application.

High oriented film performance can be achieved with orientation ratios of less than 5, compared to six, which is often needed to deliver good optics with other leading polymers. Achieving good optics at lower stretch rates can help reduce film breakage and enhance efficiencies. It can also help reduce energy use.

Exceed™ Tough+, Exceed™ Stiff+, Exceed™ Flow+ and Exxtra™ Seal performance PE polymers deliver PE MDO films with excellent performance by providing: (Figure 1).

- Optics – similar haze properties to BOPET/BOPA and sufficient gloss
- Stiffness properties - comparable to BOPET/BOPA
- Elongation resistance during printing - flexo and rotogravure

PE Sealant film

The PE MDO film was laminated to a PE sealant film (Figure 2). The PE sealant film can contain 100% virgin performance PE polymers (Cycle 1—Table 2) or it can include recycled PE in the core (Cycle 2—Table 2)

Solvent-free adhesive lamination

Loctite® Liofol solvent-free adhesives from **Henkel’s** newly introduced RE product range are “designed for recycling.” These adhesives contribute to the success of full PE SUP films by offering a set of features allowing homogenous laminates to be recycled mechanically with excellent results. This is achieved at efficient machine speed with optimal ink compatibility for high-quality printing, high initial tack and room temperature curing.

Results

Maintains packaging integrity and optical properties

New full PE laminated SUP packages that use up to 30% recycled PE in the full laminated film structure offer comparable package integrity and optical performance to conventional SUPs. The recycled PE is placed in the sealant layer.

These recycled pouches are well-suited for non-food applications, such as detergents, dishwasher tabs and so on. Using Exceed Tough+ performance PE polymers, the properties are maintained even though up to 30% recycled PE is used in the laminated structure (Figure3), helping customers deliver sustainable solutions.

Exceed Tough+, Exceed Stiff+, Exceed Flow+ and Exxtra Seal plastomers in full PE laminated SUPs provide comparable performance to film structures containing BOPET/BOPA/BOPP (Figure 3) by delivering:


- **Toughness/stiffness balance** – damage resistant, ability to stand upright
- **Sealing performance** – packaging integrity, which can results in less waste
- **Optical properties** – glossy shelf appeal, brand visibility

Table 1: PE Machine direction orientation (MDO) film formulation

PE MDO film 25 µm 1/1/2/1/1 – MDO ratio 4.8

Printed skin	Exxtra Seal m 2012 + Exceed Tough+ m 0516
Sub-skin	ExxonMobil HDPE
Core	Exceed Tough+ m 0516
Sub-skin	ExxonMobil HDPE
Outer skin	Exxtra Seal m 2012 + ExxonMobil HDPE

Figure 1: PE Machine direction orientation (MDO) film vs. other films; 12 µm BOPET, and 15 µm BOPA films

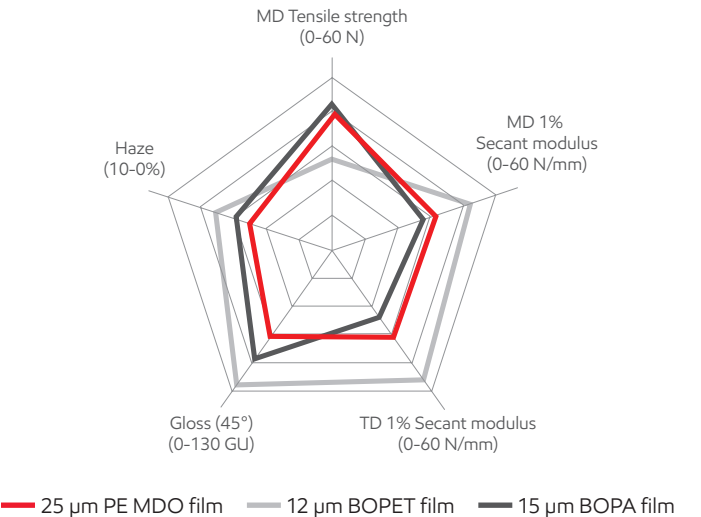

All data from tests performed by or on behalf of ExxonMobil.

Figure 2: Machine direction orientation (MDO) blown process to replace BOPET/BOPET/BOPP film to highly oriented PE film with outstanding gloss, haze and stiffness properties

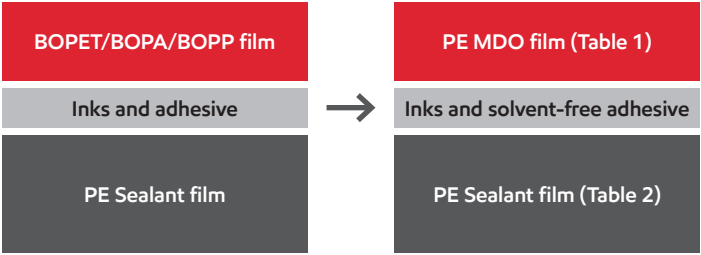


Figure 3: Comparison of full PE laminated stand-up pouches, SUP with 100% virgin PE and SUP with 30% recycled PE, with conventionally laminated SUP (12 µm BOPET laminated with 120 µm PE)

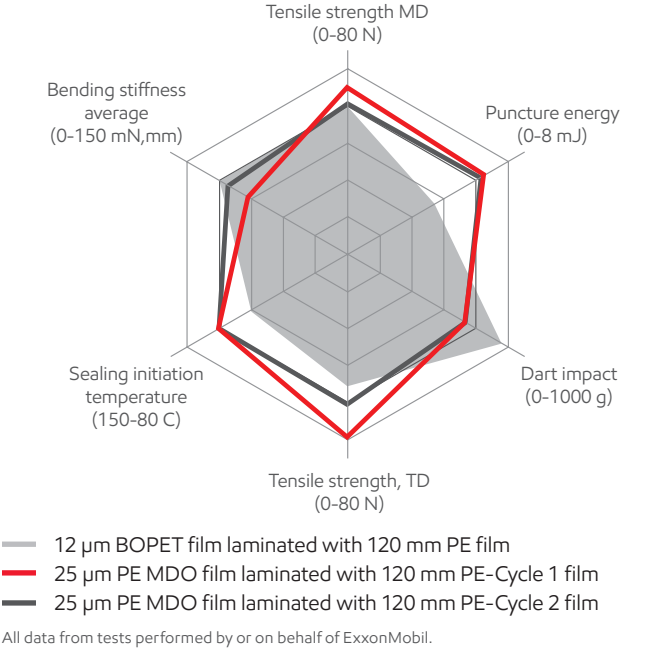


Table 2: PE Sealant film using performance PE polymers and recycled PE

	Cycle 1: 100% virgin PE 120 µm – 1/1/2/1/1	Cycle 2: Contains PE recycled content 120 µm - 1/1/3/1/1
Co-extrusion Layer ratio	1/1/2/1/1 120 µm	1/1/3/1/1 120 µm
Sealant	Exxtra™ Seal m 2012 or Exxtra™ Seal plastomer	Exxtra Seal m 2012 or Exxtra Seal plastomer
Sub-skin	Exceed™ Flow+ m 0938	Exceed Flow+ m 0938 + white MB
Core	Exceed™ Tough+ m 0814 + ExxonMobil HDPE	80% PE recycled content + Exceed Tough+ m 0814
Sub-skin	Exceed Flow+ m 0938	Exceed Flow+ m 0938
Lamination	Exceed Tough+ m 0814	Exceed Tough+ m 0814

PE Product portfolio – create sustainable laminated SUPs

Grade name	Density (g/cm³)	Melt index (g/10 min)	MDO layer	Sealant layer
Exceed Tough+ m 0516 series	0.916	0.50	•	
Exceed Tough+ m 0814 series	0.914	0.80	•	•
Exxtra Seal m 2012 series	0.912	2.00		•
Exceed Flow+ m 0938.MC	0.940	0.90		•
Exceed™ Stiff+ m 0238.MC	0.940	0.20	•	
ExxonMobil™ HD 6107FL	0.961	0.70	•	•
ExxonMobil HD 5805	0.958	0.45	•	•

Contact us for more information: exxonmobilchemical.com/SUP

Bring your impossible



©2025 ExxonMobil. ExxonMobil, the ExxonMobil logo, the interlocking "X" device and other product or service names used herein are trademarks of ExxonMobil, unless indicated otherwise. This document may not be distributed, displayed, copied or altered without ExxonMobil's prior written authorization. To the extent ExxonMobil authorizes distributing, displaying and/or copying of this document, the user may do so only if the document is unaltered and complete, including all of its headers, footers, disclaimers and other information. You may not copy this document to or reproduce it in whole or in part on a website. ExxonMobil does not guarantee the typical (or other) values. Any data included herein is based upon analysis of representative samples and not the actual product shipped. The information in this document relates only to the named product or materials when not in combination with any other product or materials. We based the information on data believed to be reliable on the date compiled, but we do not represent, warrant, or otherwise guarantee, expressly or impliedly, the merchantability, fitness for a particular purpose, freedom from patent infringement, suitability, accuracy, reliability, or completeness of this information or the products, materials or processes described. The user is solely responsible for all determinations regarding any use of material or product and any process in its territories of interest. We expressly disclaim liability for any loss, damage or injury directly or indirectly suffered or incurred as a result of or related to anyone using or relying on any of the information in this document. This document is not an endorsement of any non-ExxonMobil product or process, and we expressly disclaim any contrary implication. The terms "we," "our," "ExxonMobil Product Solutions on other Case Studies" and "ExxonMobil" are each used for convenience, and may include any one or more of ExxonMobil Product Solutions on other Case Studies, Exxon Mobil Corporation, or any affiliate either directly or indirectly stewarded.

What's new: ExxonMobil Signature Polymers

All our polymers are now positioned under a single portfolio brand: Signature Polymers. The aim is to simplify our product architecture and naming to improve portfolio navigation for you. We would like to stress that our commitment to high quality products remains the same, it is the names that change. Everything else remains the same. We will be making these modifications over the next six months so you will see both old and new grade names highlighted during that time.

Here's a quick overview of brands and grade names that have changed in this document:

Legacy commercial name	New commercial name
Enable™ 4002	Exceed™ Stiff+ m 0238
Exceed™ XP 8656	Exceed™ Tough+ m 0516
Exceed™ 2012	Exxtra™ Seal m 2012
Enable 4009	Exceed™ Flow+ m 0938
Exceed XP 8784	Exceed Tough+ m 0814
ExxonMobil™ HDPE HTA 108	ExxonMobil™ HD 6107FL
ExxonMobil HDPE 7845.30	ExxonMobil HD 5805

Some of our existing Exceed, Achieve, Paxon and premium PP/HD grades have moved to Exceed brand; most existing Enable grades have moved to Exceed Flow[+]; most of our existing Exceed XP grades have moved to Exceed Tough[+]; most of our existing Exceed S grades have moved to Exceed Stiff[+]. More details here https://www.exxonmobilchemical.com/en/brands/signature-polymers/exceed_high_performance_polymers or contact your ExxonMobil representative to know more.

Want to see what's changed in our portfolio? Go to [exxonmobilchemical.com/sptransform](https://www.exxonmobilchemical.com/sptransform)