



Eliminate end-point giveaway and increase profits with dewaxing technology

Energy lives here™


ExxonMobil drop-in catalyst generates outstanding benefits through jet fuel increase and by enabling production of full-range diesel.

Challenge:

Reduce product giveaway in a cold flow property constrained environment

A North American refiner was producing ultra-low-sulphur-diesel (ULSD) in a 800 psig hydrotreater. Meeting pour point and cloud point specifications required the refiner to blend kerosene into the hydrotreater feed, resulting in downgrading jet fuel to diesel and significant giveaway on the product end-point. The refiner's goal was to increase profitability by eliminating this end-point giveaway to meet the hydraulic constraints of the unit. [Figure 1].

Figure 1:

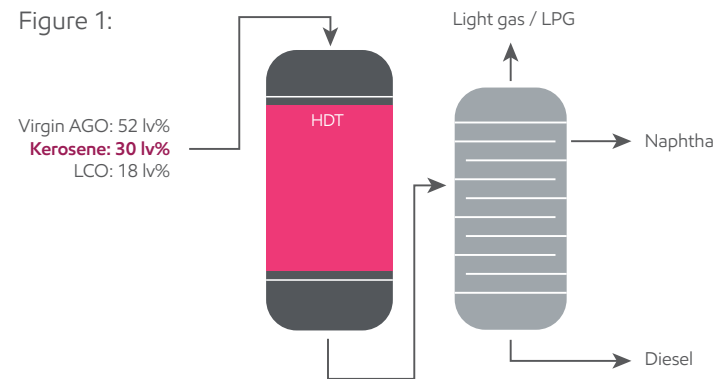

Diesel	Value	Spec
Pour point, °F	-5.3	-5.0
Cloud point, °F	0.0	0.0
D86 T90 % off	577°F	640°F

Solution:

Introduce MIDW™ proprietary technology and services into the refining process

ExxonMobil applied its technical expertise and owner-operator experience while working closely with the refiner to analyze the situation and proposed two options:


1. Optimize placement of MIDW catalyst within the reactor, which enables production of high cetane and low cloud and pour point diesel at higher yields, eliminating the need for kerosene blending to meet cold-flow properties.
2. Use an additional reactor to provide additional flexibility.

After evaluation, the refiner chose to optimize placement of MIDW catalyst in the existing reactor. [Option 1 in Figure 2].

Figure 2:

Option 1 (Selected): Optimize placement of MIDW catalyst in the existing reactor

Option 2: Use an additional reactor to provide added flexibility

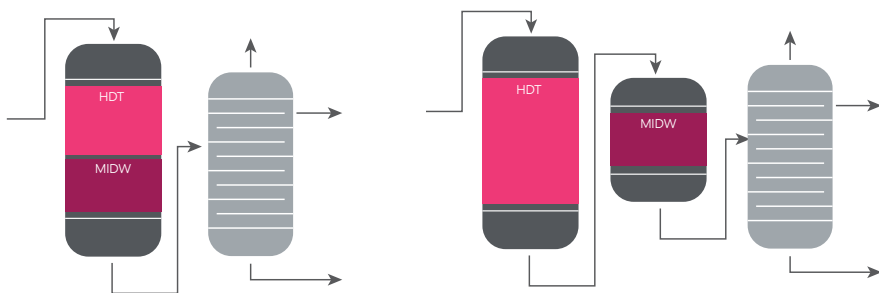


Result:

Improved profitability and elimination of end point giveaway

The implementation of ExxonMobil's robust catalyst solution enabled feed rebalancing, resulting in completely eliminating the end point reduction issue. The kerosene component was used to make jet, which allowed the AGO endpoint to be increased, thereby netting more higher-value products without affecting performance. This led to a jet fuel yield increase and an AGO upgrade to diesel, resulting in estimated annual benefits greater than \$20 million per year. [Figure 3].

Figure 3:

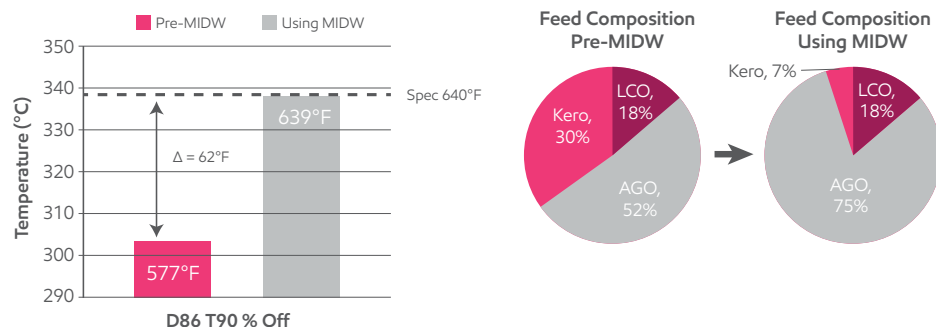

Estimated annual benefits:

\$20 MM/yr+

End point giveaway reduction:

Improved feed T90
→ ULSD unit by 63°F

For more information, visit:
www.catalysts-licensing.com

©2019 ExxonMobil. ExxonMobil, the ExxonMobil logo, the interlocking "X" device and other product or service names used herein are trademarks of ExxonMobil, unless indicated otherwise. This document may not be distributed, displayed, copied or altered without ExxonMobil's prior written authorization. To the extent ExxonMobil authorizes distributing, displaying and/or copying of this document, the user may do so only if the document is unaltered and complete, including all of its headers, footers, disclaimers and other information. You may not copy this document to or reproduce it in whole or in part on a website. ExxonMobil does not guarantee the typical (or other) values. Any data included herein is based upon analysis of representative samples and not the actual product shipped. The information in this document relates only to the named product or materials when not in combination with any other product or materials. We based the information on data believed to be reliable on the date compiled, but we do not represent, warrant, or otherwise guarantee, expressly or impliedly, the merchantability, fitness for a particular purpose, freedom from patent infringement, suitability, accuracy, reliability, or completeness of this information or the products, materials or processes described. The user is solely responsible for all determinations regarding any use of material or product and any process in its territories of interest. We expressly disclaim liability for any loss, damage or injury directly or indirectly suffered or incurred as a result of or related to anyone using or relying on any of the information in this document. This document is not an endorsement of any non-ExxonMobil product or process, and we expressly disclaim any contrary implication. The terms "we," "our," "ExxonMobil Chemical" and "ExxonMobil" are each used for convenience, and may include any one or more of ExxonMobil Chemical Company, Exxon Mobil Corporation, or any affiliate either directly or indirectly stewarded.